
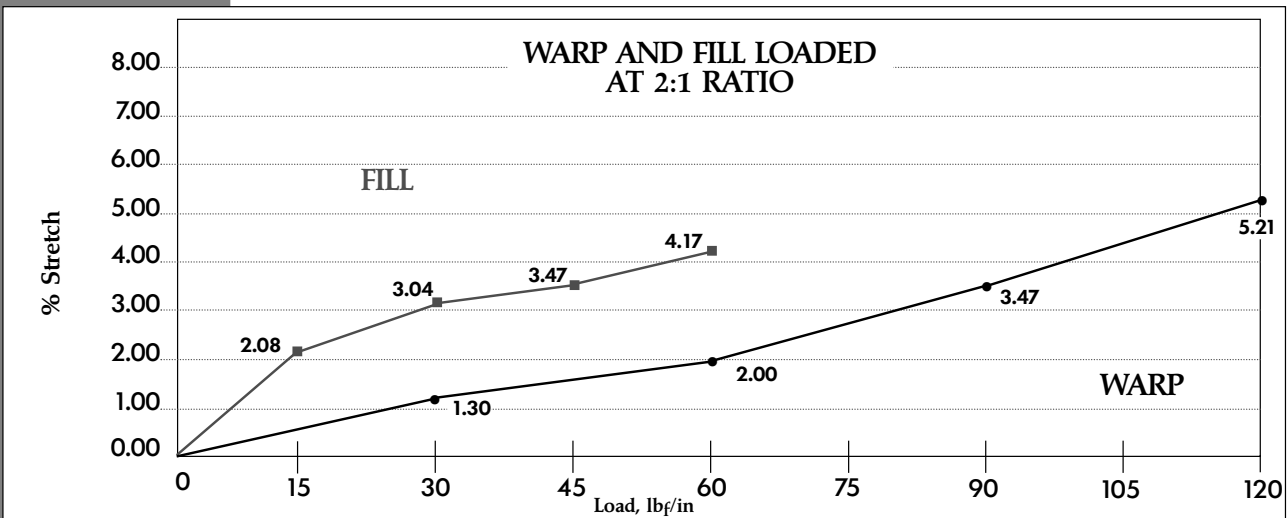
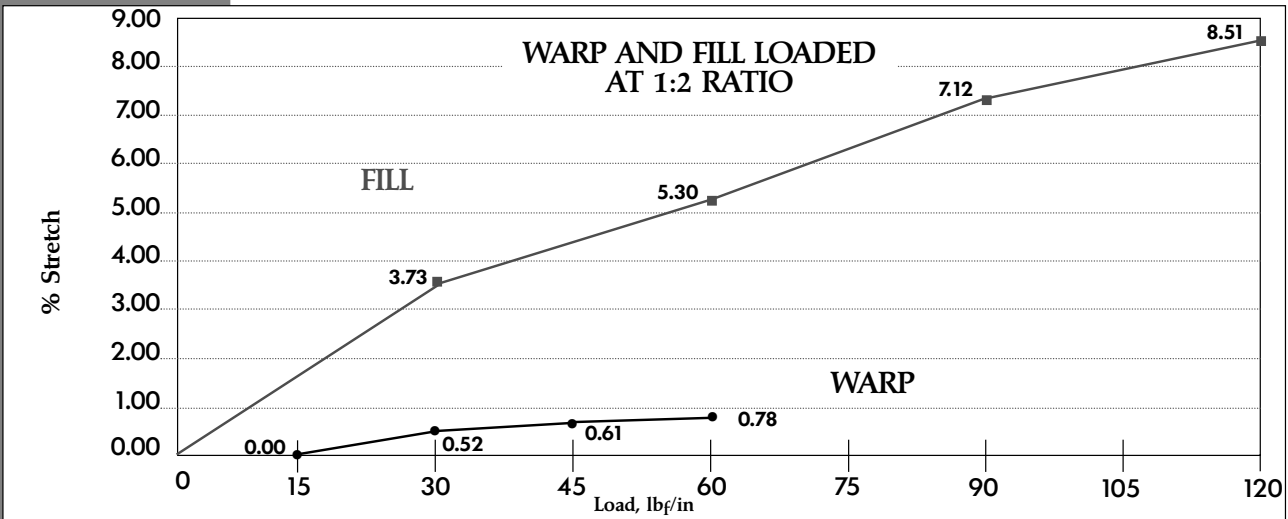


## High Performance 9034 Architectural Fabric

9034 Architectural	Standard	Metric
Base Fabric Type Base Fabric Weight (nominal)	Polyester 10.0 oz/yd <sup>2</sup>	Polyester 339 g/m <sup>2</sup>
Finished Coated Weight ASTM D751	34 oz/yd <sup>2</sup> +2/-1 oz/yd <sup>2</sup>	1153 g/m <sup>2</sup> +70/-35 g/m <sup>2</sup>
Tongue Tear ASTM D751	8"x10" sample @ 12 in/min. 300/300 lb <sub>f</sub>	20.3 cm x 25.4 cm sample @ 30.5 cm/min. 1335/1335 N
Trapezoid Tear ASTM D4533	100/100 lb <sub>f</sub>	445/445 N
Grab Tensile ASTM D751	840/840 lb <sub>f</sub>	3738/3738 N
Strip Tensile ASTM D751 Procedure B	650/650 lb <sub>f</sub> /in	578/578 daN/5 cm
Adhesion ASTM D751 Dielectric Weld	10 lb <sub>f</sub> /in	9 daN/5 cm
Hydrostatic Resistance ASTM D751 Procedure A	500 psi	3.45 MPa
Dead Load MIL-T-52983E (modified) Para.4.5.2.19	2 in seam, 4 hr, 1 in strip 266 lb <sub>f</sub> @ room temp. 133 lb <sub>f</sub> @ 160° F	5 cm seam, 4 hr, 2.5 cm strip 1183 N @ room temp. 591 N @ 71° C
Low Temperature ASTM D2136 1/8" mandrel, 4 hr	Pass -40° F Pass -67° F	Pass -40° C Pass -55° C
Flame Resistance	Meets California fire marshal requirements, NFPA 701, and ASTM D6413 - 2 second flameout ASTM E84 - flame spread index <25, smoke development rating <450.	

## ARCHITECTURAL FABRIC SPECIFICATIONS

**Biaxial Stretch Test**

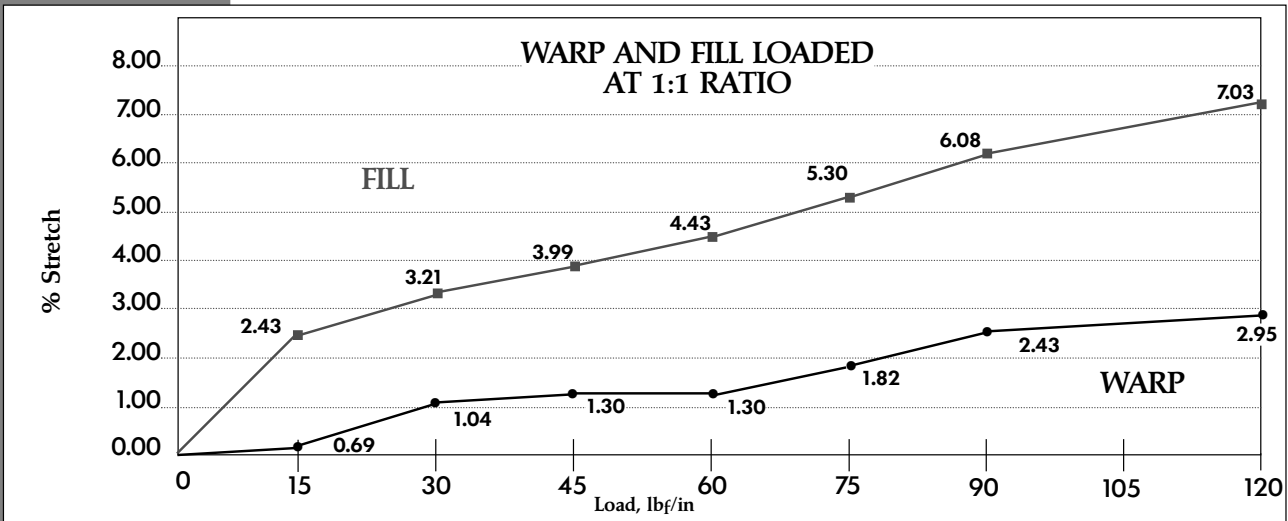

We believe this information is the best currently available on the subject. We offer it as a suggestion in any appropriate experimentation you may care to undertake. It is subject to revision as additional knowledge and experience are gained. We make no guarantee of the results and assume no obligation or liability whatsoever in connection with this information. In case of conflict between standard and metric specifications, standard shall apply.